


A WALK THROUGH THE WORLD OF IIID AND BEYOND

JULY 2009 | RS.100

www.insiteindia.in

# insite



INSTITUTE  
OF INDIAN  
INTERIOR  
DESIGNERS

## insite story



iiid-mk awards

## international insite



ar. luis longhi

## insite icon



ar. prem nath


# CELEBRATING DESIGN





Gain the competitive edge with

# Anutone Subtex Ceilings

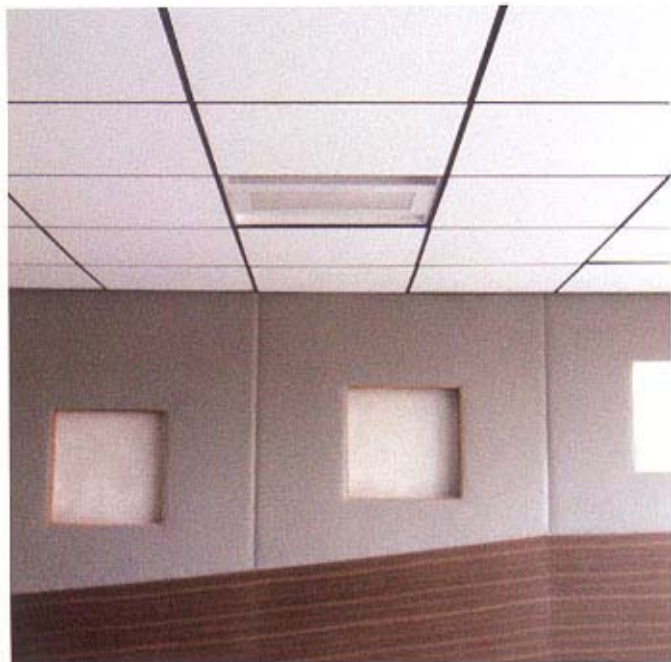

Subtex, introduced by Anutone a year ago, has been a huge success story. A smooth-surfaced, lightweight tile, with none of the usual pinhole or worm-like patterns, ensures soothing aesthetics and high light reflectance. Added advantages like sound absorption and humidity resistance enhance product appeal. Here is how AnutoneSubtex, for modular white ceilings, benefits the ecosystem.

## Consultants / Architects

AnutoneSubtex offers the designer a plethora of options – surface renders, large-format 1200x1200mm, concealed edge etc. Moreover, Anutone offers complete system solutions with AnutoneSkelet framework – Infinity or Screenline perimeter trims for Carnival Floats, transitions and bulkheads, HVAC pockets at glazing mullions etc.

## Contractors / Project Managers

All components of the system are pre-finished and lab-certified which means failsafe install, near-zero snag list and quick project turnaround. Once the framework is installed, AnutoneSubtex can be placed in grid even after carpeting and furniture is in place, allowing flexible sequencing, a boon to sites on tight timelines.

## Clients / End-users

The serenity of unbroken white surfaces, the crispness of neat joint lines, the sublimity of diffused lighting, the cocooning comfort of quietitude - all this and more ensures less strain and stress, a feel-good factor that translates to higher output, thus providing the business with a competitive edge!



## HIGHLIGHTS

### Surface

White surface finish with fine monolithic texture for high light reflectance; less lighting requirements.

### Large Format

1200x1200mm sizes means less busy framework; better aesthetics

### Light Weight

At 1.5-3kgs/m<sup>2</sup>, does not contribute significantly to structural load

### High NRC

0.9 NRC broadband sound absorption; highest for modular white ceilings

### Fast Track

Panels can be laid in T-grids even after fitouts/carpeting; large size means 4-tiles-in-1-tile install

To know more, visit [www.anutone.com/textures.htm](http://www.anutone.com/textures.htm)