

# Salon Slats

LINEAL PERF WOOD CEILINGS AND WALLS  
[www.anutone.com/slats.htm](http://www.anutone.com/slats.htm)



# Salon Slats

## Lineal perf wood ceilings and walls

The Slats range consists of panels made from acoustic fibreboards with lineal perforations for the avante garde look.

### What's new?


**Slim Slats** - Slats now comes in two new widths 160mm and 128mm to make it very flexible for curved ceilings apart from regular flat ceilings.

**Wide Slats** - Apart from 16mm and 32mm lineal grooves there is a new economical 64mm groove for wider bands of melamine or veneer.

**Slim Diffuse** - Also new is Slats Diffuse with only lineal grooves on the surface and no perf or fleece on reverse when sound absorption is not the criteria. Slats Diffuse visually blends with Slats as the surface looks exactly the same.

**Colour Slats** - Introducing Slats in colours, not just wood finishes. Colour slats is available in two styles - core pigmented fibreboard grooved and supplied, and normal fibreboard with surface coating after grooving.


### Variants




**L16-2** - 2mm grooves @ 16mm centres



**L32-2** - 2mm grooves @ 32mm centres



**L64-2** - 2mm grooves @ 64mm centres




Colour Slats

### Finishes

#### MELAMINE



#### VENEER

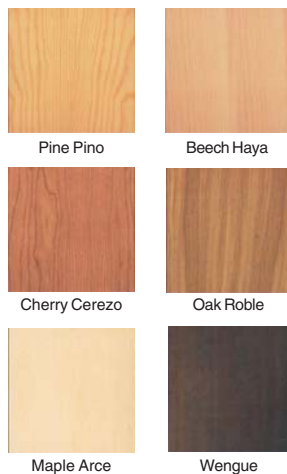

The veneer shades and patterns depicted in the pictures above are an approximate reproduction of the actual shades and patterns. Differences may appear between pictures and products.

### Size


2430 x 128/160 mm

### Edge Details



Tongue Groove

### Acoustics

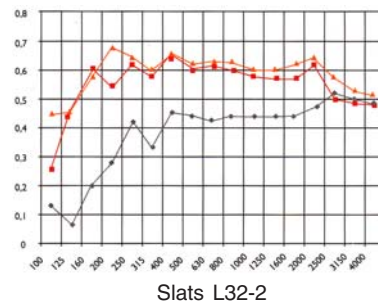

### Applications

Designer walls and ceilings in airports, hotels, restaurants, offices, malls, studios, home theatres - and wherever the warmth of wood and the quality of factory-finished, lab-certified panels is a requisite.

### Technical Summary

Ceiling type	Full-Span, Seamless
Tile format	Planks
Surface	Melamine, Veneer, Colour
Core	Fibreboard
Geometry	Flat
Thickness (mm)	16
Size (mm)	width 128 & 160 length 2430
Density (Kg/m <sup>3</sup> )	750 for FR
Weight (Kg/m <sup>2</sup> )	12 for FR
Fire (Class)	Class A
NRC	upto 0.75
Thermal (W/mk)	na
Climate (°C, RH)	45, 70
Light (%)	70 for Beech
Green (VoC, RC%)	Low, 50%
Warranty	3 years
Colour	See chart
Maintenance	Dry Wipe, Wet Wipe

# Salon **Slats**





# anutone®

makes you feel good™

## ANUTONE WALLS & CEILINGS

a division of Anutone Acoustics Limited

231, 7th Cross, Indiranagar 1st Stage, Bengaluru 560 038, India  
 Phone +9180 2520 3114 Fax +9180 2520 3115 info@anutone.com

**MUMBAI**

+9122 2643 9732

**DELHI**

+9111 2437 8061

**CHENNAI**

+9144 4305 4935

[www.anutone.com](http://www.anutone.com)



Anutone is member of

